



UNITED STATES PATENT AND TRADEMARK OFFICE

MW

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/090,146	03/05/2002	Chikaho Ikeda	112116	5449
25944	7590	11/21/2003	EXAMINER	
OLIFF & BERRIDGE, PLC P.O. BOX 19928 ALEXANDRIA, VA 22320			FLORES RUIZ, DELMA R	
			ART UNIT	PAPER NUMBER
			2828	

DATE MAILED: 11/21/2003

Please find below and/or attached an Office communication concerning this application or proceeding.

Office Action Summary

Application No.

10/090,146

Applicant(s)

IKEDA, CHIKAHO

Examiner

Delma R. Flores Ruiz

Art Unit

2828

NW

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) FROM THE MAILING DATE OF THIS COMMUNICATION.


- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133).
- Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 05 March 2002.
- 2a) ☐ This action is **FINAL**. 2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1-33 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 1-33 is/are rejected.
- 7) ☐ Claim(s) _____ is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.


PAUL IP
SUPERVISORY PATENT EXAMINER
TECHNOLOGY CENTER 2800

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☐ The drawing(s) filed on _____ is/are: a) ☐ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. §§ 119 and 120

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
a) ☐ All b) ☐ Some * c) ☐ None of:
1. ☐ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. _____.
3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).
* See the attached detailed Office action for a list of the certified copies not received.
- 13) ☐ Acknowledgment is made of a claim for domestic priority under 35 U.S.C. § 119(e) (to a provisional application) since a specific reference was included in the first sentence of the specification or in an Application Data Sheet. 37 CFR 1.78.
a) ☐ The translation of the foreign language provisional application has been received.
- 14) ☐ Acknowledgment is made of a claim for domestic priority under 35 U.S.C. §§ 120 and/or 121 since a specific reference was included in the first sentence of the specification or in an Application Data Sheet. 37 CFR 1.78.

Attachment(s)

- 1) ☒ Notice of References Cited (PTO-892) 4) ☐ Interview Summary (PTO-413) Paper No(s) _____
- 2) ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948) 5) ☐ Notice of Informal Patent Application (PTO-152)
- 3) ☐ Information Disclosure Statement(s) (PTO-1449) Paper No(s) _____ 6) ☐ Other: _____

DETAILED ACTION

Claim Rejections - 35 USC § 102

The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the basis for the rejections under this section made in this Office action:

A person shall be entitled to a patent unless –

(e) the invention was described in (1) an application for patent, published under section 122(b), by another filed in the United States before the invention by the applicant for patent or (2) a patent granted on an application for patent by another filed in the United States before the invention by the applicant for patent, except that an international application filed under the treaty defined in section 351(a) shall have the effects for purposes of this subsection of an application filed in the United States only if the international application designated the United States and was published under Article 21(2) of such treaty in the English language.

Claims 1 – 5 and 14 – 33 are rejected under 35 U.S.C. 102(e) as being anticipated by Sakuragi (6,222,357).

Regarding claim 1, Sakuragi discloses an apparatus for driving a light emitting element in response to input data, the light emitting element caused to emit light by flowing a direct current, the apparatus comprising: a voltage source (see Figs. 1 and 2, Character 5); and a switching section (see Figs. 1 and 2 Character S1 – S4) disposed between the voltage source and the light emitting element (see Figs. 1 and 2 Characters D1 and D2) and controlled on a basis of the input data (Abstract), wherein a

Art Unit: 2828

resistance value from an output end of the voltage source to a drive end of the light emitting element is smaller than an internal resistance value of the light emitting element; and wherein a current flowing into the voltage source is smaller than a current flowing into the light emitting element (see Figs 1 and 2, Abstract, Column 3, Lines 13 – 24, Column 4, Lines 6 – 11, 19 – 31, and 44 – 67, Column 5, Lines 1 – 2, and 60 – 67 and Column 6, Lines 1 – 8, 16 – 26, and 41 – 45).

Regarding claim 2 Sakuragi discloses a voltage source has a negative feedback loop that negatively feeds back an output and a buffer amplifier that amplifies an predetermined input voltage (see Figs 1 – 2, Column 4, Lines 6 – 11, 19 – 31, and 44 – 67, Column 5, Lines 1 – 2, and 60 – 67 and Column 6, Lines 1 – 8, 16 – 26, and 41 – 45).

Regarding claim 3, Sakuragi discloses a voltage source (see Figs. 1 and 2 Character 5) has a capacitance (see Fig. 1 Character C1 – C2) section at an output of the buffer amplifier; wherein the capacitance section of the voltage source has greater capacitance than the capacitance value of parasitic capacitance of the light emitting element, when being observed from the switching section (see Fig. 1, Characters S1 – S4) Abstract, Column 3, Lines 13 – 24, Column 4, Lines 6 – 11, 19 – 31, and 44 – 67, Column 5, Lines 1 – 2, and 60 – 67 and Column 6, Lines 1 – 8, 16 – 26, and 41 – 45).

Regarding claim 4, Sakuragi discloses the switching section changes an output voltage of the voltage source and a biasing voltage to bias the light emitting element on a basis of the input data (said limitation only recites facts and features that are well known and expected, the same features that essentially result from the use or application of a switching section changes an output voltage of the voltage source and a biasing voltage to bias the light emitting element on a basis of the input data, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 5 Sakuragi discloses an input side retaining section for retaining control voltage when controlling optical power at an input side of the buffer amplifier (said limitation only recites facts and features that are well known and expected, the same features that essentially result from the use or application of a an input side retaining section for retaining control voltage when controlling optical power at an input side of the buffer amplifier, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 14 Sakuragi discloses an apparatus for driving a light emitting element in response to input data, the light emitting element emitting light by causing a direct current to flow thereto, the apparatus comprising: a voltage driving section (see Figs. 1 and 2, Character 5) for driving the light emitting element (see Fig. 1, Characters

D1 and D2) with voltage; a current driving section for driving the light emitting element with a current; and a switching section (see Fig 1. Characters S1 – S4) for changing voltage drive by the voltage driving section and current drive by the current driving section based on the input data (see Figs 1 – 2, Abstract, Column 5, Lines 8 – 29).

Regarding claim 15 Sakuragi discloses the input data are pulse data, and wherein the switching section changes to the voltage drive by the voltage driving section in at least one of periods of rise and fall of the pulse data (said limitation only recites facts and features that are well known and expected, the same features that essentially result from the use or application of a the input data are pulse data, and wherein the switching section changes to the voltage drive by the voltage driving section in at least one of periods of rise and fall of the pulse data, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 16 Sakuragi discloses the switching section (see Fig. 1, Characters S1 – S4) is able to simultaneously select the voltage drive by the voltage driving section and the current drive by the current driving section; and wherein the switching section simultaneously selects the current drive by the current driving section when being changed to the voltage drive by the voltage driving section to supply a current by the current drive to the light emitting element (see Figs 1 – 2, Abstract,

Column 5, Lines 8 – 29).

Regarding claim 17 Sakuragi discloses the voltage driving section includes a bias voltage applying section for applying bias voltage to the light emitting element; and wherein the switching section changes to the voltage drive by the voltage driving section in the period of rise of the pulse data, subsequently changes to the current drive by the current driving section, and thereafter changes to voltage drive by the bias voltage applying section in the period of fall of the pulse data (said limitation only recites facts and features that are well known and expected, the same features that essentially result from the use or application of a switching section changes to the voltage drive by the voltage driving section in the period of rise of the pulse data, subsequently changes to the current drive by the current driving section, and thereafter changes to voltage drive by the bias voltage applying section in the period of fall of the pulse data, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 18 Sakuragi discloses the voltage driving section includes a buffer section for amplifying an input voltage and an output side retaining section for retaining voltage corresponding to an output voltage of the buffer section at an output side of the buffer section; and wherein the switching section supplies the voltage retained by the output side retaining section to the light emitting element (said limitation only recites facts and features that are well known and expected, the same features that

essentially result from the use or application of a buffer section for amplifying an input voltage and an output side retaining section for retaining voltage corresponding to an output voltage of the buffer section at an output side of the buffer section; and wherein the switching section supplies the voltage retained by the output side retaining section to the light emitting element, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 19 Sakuragi discloses the voltage driving section includes an input side retaining section for retaining voltage corresponding to a control voltage when controlling optical power at the input side of the buffer section (see Figs. 1 - 5).

Regarding claim 20 Sakuragi discloses the current driving section includes a retaining section for retaining a voltage corresponding to the output voltage of the buffer section and a constant current source for outputting a current corresponding to the voltage retained by the retaining section; and wherein the switching section supplies a current outputted from the constant current source to the light emitting element (see Figs 1 - 5),

Regarding claims 21 and 28 Sakuragi discloses a compensating section for compensating a voltage of at least one of rise and fall of the pulse data, corresponding to a fluctuation in temperature of the light emitting element (said limitation only recites

facts and features that are well known and expected, the same features that essentially result from the use or application of a compensating section for compensating a voltage of at least one of rise and fall of the pulse data, corresponding to a fluctuation in temperature of the light emitting element, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 22 Sakuragi discloses the compensating section detects a terminal voltage of the light emitting element and compensates the voltage on a basis of the detection result (said limitation only recites facts and features that are well known and expected, the same features that essentially result from the use or application of a compensating section detects a terminal voltage of the light emitting element and compensates the voltage on a basis of the detection result, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 23 Sakuragi discloses the voltage driving section (see Fig. 1, Character 5) includes a bias voltage applying section for applying a bias voltage to the light emitting element (see Fig. 1, Characters D1 and D2); wherein the current driving section includes a bias current supplying section for outputting a bias current corresponding to the bias voltage; and wherein the switching section (see Fig. 1, Characters S1 – S4) changes to the voltage drive by the voltage driving section in the period of rise of the pulse data (Abstract), thereafter changes to the current drive by the

current driving section, subsequently changes to the voltage drive by the bias voltage applying section in the period of fall of the pulse data, and changes to the current drive by the bias current supplying section in a period of OFF of the pulse data to supply the bias current to the light emitting element (see Figs 1 – 2, Abstract, Column 5, Lines 8 – 29, and 45 – 59).

Regarding claim 24 Sakuragi discloses the voltage driving section includes: a buffer section for amplifying an input voltage; an output side retaining section for retaining a voltage corresponding to the output voltage of the buffer section at the output side of the buffer section; and an input side retaining section for retaining a voltage corresponding to the control voltage when controlling optical power at the input side of the buffer section; wherein the switching section supplies the voltage retained by the output side retaining section to the light emitting element; and wherein the compensating section detects a terminal voltage of the light emitting element and compensates the retaining voltage of the input side retaining section on a basis of the detection result (said limitation only recites facts and features that are well known and expected, the same features that essentially result from the use or application of a input side retaining section for retaining a voltage corresponding to the control voltage when controlling optical power at the input side of the buffer section; wherein the switching section supplies the voltage retained by the output side retaining section to the light emitting element; and wherein the compensating section detects a terminal voltage of

the light emitting element and compensates the retaining voltage of the input side retaining section on a basis of the detection result, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claims 25 - 26, Sakuragi discloses the compensating section has a detecting section for detecting the terminal voltage of the light emitting element; and wherein the compensating section compensates the retaining voltage of the input side retaining section on a basis of the detection result of the detection section and a period of the voltage drive by the voltage driving section is less than the minimum pulse width of the pulse data (said limitation only recites facts and features that are well known and expected, the same features that essentially result from the use or application of a the compensating section has a detecting section for detecting the terminal voltage of the light emitting element; and wherein the compensating section compensates the retaining voltage of the input side retaining section on a basis of the detection result of the detection section and a period of the voltage drive by the voltage driving section is less than the minimum pulse width of the pulse data, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 27 Sakuragi discloses a period of the voltage drive by the voltage driving section is less than the minimum pulse width of the pulse data (said limitation only recites facts and features that are well known and expected, the same

features that essentially result from the use or application of a period of the voltage drive by the voltage driving section is less than the minimum pulse width of the pulse data, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi)

Regarding claim 29 Sakuragi discloses the input side and output side retaining sections are capacitors (see Figs. 1 – 5).

Regarding claim 30 Sakuragi discloses a system for driving light emitting elements, the system comprising: a plurality of apparatus for driving the light emitting elements (see Fig. 1, Characters D1 and D2) in response to input data, the light emitting elements caused to emit light by flowing a direct current, the apparatus comprising: a voltage source (see Fig. 1, Character 5); and a switching section (see Fig. 1, Characters S1 – S4) disposed between the voltage source and the light emitting element and controlled on a basis of the input data (see Figs 1 – 2, Abstract, Column 5, Lines 8 – 29, and 45 – 59, a detecting section for detecting optical power of the plurality of light emitting elements; and a error amplifying section for comparing voltage corresponding to the detection result of the detecting section and a reference voltage to amplify the error therebetween; wherein a resistance value from an output end of the voltage source to a drive end of the light emitting element is smaller than an internal resistance value of the light emitting element; wherein a current flowing into the voltage

Art Unit: 2828

source is smaller than a current flowing into the light emitting element; and wherein each of the plurality of apparatus for driving light emitting elements drives the light emitting element on a basis of outputs of the error amplifying section (see Figs 1 – 2, Abstract, Column 5, Lines 8 – 29, and 45 – 59).

Regarding claims 31 and 33, Sakuragi discloses the error amplifying section includes: an error amplifier inputted the detection result of the detecting section and the reference voltage; and a plurality of negative feedback loops for negatively feeding back output of the error amplifier to inputs thereof, the negative feedback loops provided to corresponding number of the apparatuses for driving light emitting elements; wherein each of the plurality of negative feedback loops includes: a retaining section for retaining a voltage corresponding to the output voltage of the error amplifier when controlling the optical power of the light emitting elements; and a switching section connected to the retaining section in series; wherein each of the plurality of apparatus for driving light emitting elements has an input side retaining section for retaining the retaining voltage of the corresponding retaining section in the plurality of negative feedback loops; and wherein each of the plurality of apparatus for driving light emitting elements drives the light emitting element on a basis of the retaining voltage of the input side retaining section (said limitation only recites facts and features that are well known and expected, the same features that essentially result from the use or application of a error amplifier inputted the detection result of the detecting section and the reference

voltage; and a plurality of negative feedback loops for negatively feeding back output of the error amplifier to inputs thereof, the negative feedback loops provided to corresponding number of the apparatuses for driving light emitting elements; wherein each of the plurality of negative feedback loops includes: a retaining section for retaining a voltage corresponding to the output voltage of the error amplifier when controlling the optical power of the light emitting elements; and a switching section connected to the retaining section in series; wherein each of the plurality of apparatus for driving light emitting elements has an input side retaining section for retaining the retaining voltage of the corresponding retaining section in the plurality of negative feedback loops; and wherein each of the plurality of apparatus for driving light emitting elements drives the light emitting element on a basis of the retaining voltage of the input side retaining section, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 32, Sakuragi discloses A system for driving light emitting elements, the system comprising: an apparatus for driving a light emitting element in response to input data, the light emitting element emitting light by causing a direct current to flow thereto, the apparatus comprising: a voltage driving section for driving the light emitting element with voltage; a current driving section for driving the light emitting element with a current; and a switching section for changing voltage drive by the voltage driving section and current drive by the current driving section based on the

input data, a detecting section for detecting optical power of the plurality of light emitting elements; and a error amplifying section for comparing voltage corresponding to the detection result of the detecting section and a reference voltage to amplify the error therebetween, wherein a resistance value from an output end of the voltage source to a drive end of the light emitting element is smaller than an internal resistance value of the light emitting element; wherein a current flowing into the voltage source is smaller than a current flowing into the light emitting element; and wherein each of the plurality of apparatus for driving light emitting elements drives the light emitting element on a basis of outputs of the error amplifying section(see Figs 1 and 2, Abstract, Column 3, Lines 13 – 24, Column 4, Lines 6 – 11, 19 – 31, and 44 – 67, Column 5, Lines 1 – 2, and 60 – 67 and Column 6, Lines 1 – 8, 16 – 26, and 41 – 45).

Claim Rejections - 35 USC § 103

The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

Claims 6 – 13 are rejected under 35 U.S.C. 103(a) as being unpatentable over Sakuragi (6,222,357) in view of Ema et al (5,036,519).

Regarding claims 6, 9, and 12 Sakuragi discloses an apparatus for driving a laser element as a light emitting element in response to input data comprising: a first voltage source (see Fig. 1, Character 5) for causing the laser element to be a forward biasing state and generating a first voltage that is lower than a threshold voltage of laser oscillation; Sakuragi discloses the claimed invention except for a second voltage source for causing the laser element to be a forward biasing state and generating a second voltage that is larger than the threshold voltage of laser oscillation; and a switching section for changing the first voltage and the second voltage on a basis of the input data and applying the changed voltage directly to a drive end of the laser element, wherein a resistance value from an output end of the second voltage source and the drive end of the laser element is smaller than the internal resistance value of the laser element; and wherein a current flowing into the second voltage source is smaller than that flowing into the laser element. It would have been obvious at the time of applicant's invention, to combine Ema of teaching a second voltage, switching, etc with driving a laser element because it would have been obvious to one having ordinary skill in the art at the time the invention was made to a second voltage source for causing the laser element to be a forward biasing state and generating a second voltage that is larger than the threshold voltage of laser oscillation; and a switching section for changing the first voltage and the

second voltage on a basis of the input data and applying the changed voltage directly to a drive end of the laser element, wherein a resistance value from an output end of the second voltage source and the drive end of the laser element is smaller than the internal resistance value of the laser element; and wherein a current flowing into the second voltage source is smaller than that flowing into the laser element, since it has been held that mere duplication of the essential working parts of a device involves only routine skill in the art. *St. Regis Paper Co. v. Bemis Co.*, 193 USPQ 8.

Regarding claim 7, Sakuragi discloses the laser element is a surface emitting laser element (see Fig. 1 – 2, Characters D1 and D2).

Regarding claim 8 Sakuragi discloses the surface emitting laser element includes a plurality of light emitting parts emitting a plurality of laser beams; and wherein the first voltage is commonly applied to at least two of the light emitting parts of the plurality of light emitting parts (see Figs 1 – 2).

Regarding claim 10 Sakuragi discloses input side retaining section for retaining control voltage when controlling optical power at an input side of the buffer amplifier (said limitation only recites facts and features that are well known and expected, the same features that essentially result from the use or application of a input side retaining section for retaining control voltage when controlling optical power at an input

side of the buffer amplifier, and therefore said limitations are said to be inherently disclosed in the teachings of Sakuragi).

Regarding claim 11 Sakuragi discloses a current supplying section for supplying a compensation current, which compensates a fluctuation of an output current of the negative feedback amplifying circuit due to changing of the switching section, to the drive end of the laser element (see Figs 1 – 2).

Regarding claim 13 Sakuragi discloses the current supplying section includes a current source having an MOS transistor and an MOS switch connected between the current source and the drive end of the laser element; and wherein the MOS transistor of the current source and the MOS switch are formed of a dual gate MOS transistor (Abstract, Column 2, Lines 64 – 67, Column 3, Lines 1 – 45).


Conclusion

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Delma R. Flores Ruiz whose telephone number is (703) 308-6238. The examiner can normally be reached on M - F.


Art Unit: 2828

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Paul Ip can be reached on (703) 308-3098. The fax phone number for the organization where this application or proceeding is assigned is (703) 308-7722.

Any inquiry of a general nature or relating to the status of this application or proceeding should be directed to the receptionist whose telephone number is (703) 306-3431.

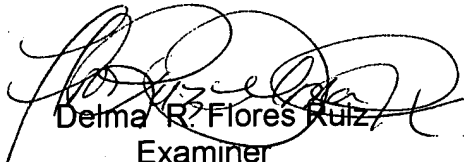

Delma R. Flores Ruiz
Examiner
Art Unit 2828



Paul Ip
Supervisor Patent Examiner
Art Unit 2828

DRFR/PI
November 5, 2003